

microinverter

User Manual

V1.0

NBQ800-EU
NBQ1000-EU
NBQ1200-EU

Statement:

Before using this product, please read this document carefully to ensure that you fully understand it and can use it properly. After reading this document, please keep it in a safe place for future reference.

Improper operation of this product may result in serious injury to yourself or others, or damage to this product and other property. By using this product you are deemed to have understood, acknowledged and accepted all the terms and conditions of this document. The Company shall not be liable for any damages caused by the user's failure to operate this product in accordance with the instructions for use. In accordance with laws and regulations, the Company reserves the right of final interpretation of this document and all documents related to this product. This document is subject to update without prior notice, please visit the official website for the latest version.

Catalogs

1.	IMPORTANT NOTES	3
	1.1 Scope of products	3
	1.2 Description of symbols	3
2.	SECURITY GUIDELINES	4
	2.1 Important safety instructions	4
	2.2 Environmental requirements	4
3.	DELIVERY LIST	4
4.	OVERVIEW	4
	4.1 Overview of grid-connected PV inverter systems	4
	4.2 Microinverter Overview	5
	4.3 Compatibility	6
	4.4 External dimensions	6
	4.5 Introduction to Functions	6
	4.6 System Monitoring	6
5.	INSTALLATION	7
	5.1 Installation requirements	7
	5.2 Parts and tools required for installation	7
	5.3 Installation steps	8
6.	APP	12
7.	TROUBLESHOOTING	13
	7.1 LED status indication	15
	7.2 Replacing the microinverter	15
8.	DATA SHEET	16
9.	ANNEX 1	18
	Installation Map	18
10.	ANNEX 2	18
	Wiring Diagram	19

1. important notes








1.1 Product Scope

This manual describes the assembly, installation, commissioning, maintenance and troubleshooting of the following models of microinverters.

NBQ800-EU NBQ1000-EU

NBQ1200-EU

1.2 Description of symbols

notation	instructions
	High voltage hazard High voltages in microinverters can be life-threatening.
	Caveat Do not get within 8 inches (20 cm) of the microinverter while it is operating.
	Watch out for the heat. The inverter heats up during operation and should be operated to avoid contact with metal surfaces.
	Disposal of equipment Electronic equipment should not be disposed of with household waste, and old, unusable appliances must be collected and disposed of separately, in accordance with local ordinances or regulations.
	CE mark The microinverters are labeled with the CE mark to certify that the device complies with the European Low Voltage and EMC Directives.
	Operating Instructions Please read the instruction manual carefully before using this product.
	Earth (wire) The AC cable contains a ground wire and can therefore be grounded directly. For areas with special requirements, a grounding bracket is installed to complete the external grounding.
RoHS	RoHS symbol The product complies with 2011/65/EU & (EU) 2015/863.

2. Safety norm

2.1 Important safety instructions

- A) Before installing, using or servicing this product, please read all documentation carefully, which may have changed due to product updates or otherwise.
- B) All operations, including transportation, installation, start-up and maintenance, must be carried out by trained and qualified personnel.
- C) Prior to installation, check the packaging and appearance of the unit to ensure that it has not been damaged during transportation.
- D) Ensure that all cables and plugs are intact and dry before connecting to avoid electric shock.
- E) Before the end of the installation, make sure that the solar PV panels, microinverters are disconnected from the home power supply.
- F) Personal protective equipment such as gloves and goggles must be used during installation.
- G) Do not install or operate the equipment under extreme weather conditions, such as lightning, snow, heavy rain, strong winds, etc.
- H) Warning signs on the equipment must not be damaged, defaced or removed.
- I) After installation, remove any remnants of the installation, such as cut cable ties, torn insulation, etc.
- J) Do not attempt to repair the microinverter, if it fails, contact our customer support department and initiate the replacement process. Private repair or opening of the microinverter will void the warranty policy.
- K) Understand the components and functions of a grid-connected PV system and ensure that all electrical connections, as well as the voltage and frequency of the equipment, comply with local electrical standards.
- L) Use extreme caution whenever the inverter is disconnected from the utility grid, as certain components may retain enough charge to create a shock hazard.
- M) Ensure that the microinverter is mounted securely to prevent accidents or damage to the product from falling.
- N) For safety reasons, the device should use original or authorized cables, we are not responsible for damage to the device caused by the use of third-party accessories.

2.2 Environmental requirements

- A) Ensure that the equipment is installed, operated or stored in a well-ventilated area; inadequate ventilation can cause permanent damage to the equipment.
- B) Do not install or place this equipment in a strong electrical and magnetic field environment to avoid radio interference.
- C) Do not install the equipment in flammable, explosive, corrosive, extremely hot, cold and humid environments.
- D) Do not install the unit where children and pets can reach it.

3. Delivery list

- A) Micro inverter *1
- B) Power cord*1
- C) User's Manual*1
- D) M8 screw combination*2

* Please contact customer service if any parts are missing.


* Other tools and accessories involved in installation and commissioning are not included in the packing list, if you need to use, please purchase separately.

4. Summarize


4.1 Overview of grid-connected PV inverter systems

The grid-connected PV inverter system consists of PV modules, microinverters, meters and the grid. The microinverters convert the DC power generated by the PV modules into AC power that meets the


requirements of the grid, and then the AC power is connected to the grid through the meter.




photovoltaic
module



microinverter




Grid-connected
metering devices




grids

Single Microinverter Connection Diagram

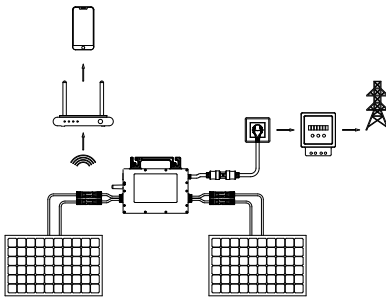

Multiple Microinverter Connection Diagram

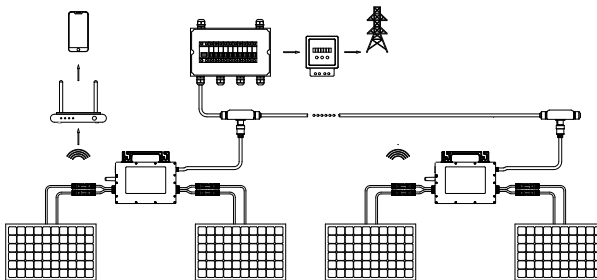

4.2 Microinverter Overview

A microinverter is a module-level solar inverter that tracks the maximum power point of each PV module.

When one PV module fails or is shaded, the other modules are not affected.

The microinverter monitors the current, voltage and power of each module, enabling module-level data monitoring.

Microinverters feature low voltage DC, eliminating the risk of exposing personnel to hazardous high voltage DC.


Microinverters are easy to install and can be varied according to the number of PV modules. The microinverter housing is designed for outdoor installation and complies with the IP67

protection rating.

4.3 Compatibility


See the "Data Sheet" in this manual to verify the electrical compatibility of the PV modules, and be sure to order PV modules suitable for the microinverter from your dealer.

4.4 External dimensions

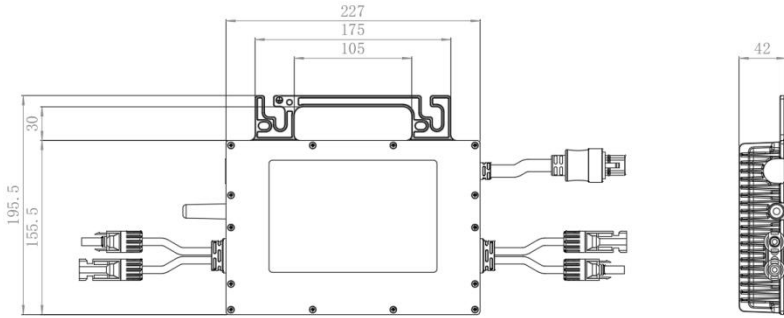

*Unit: mm

4.5 Functionality

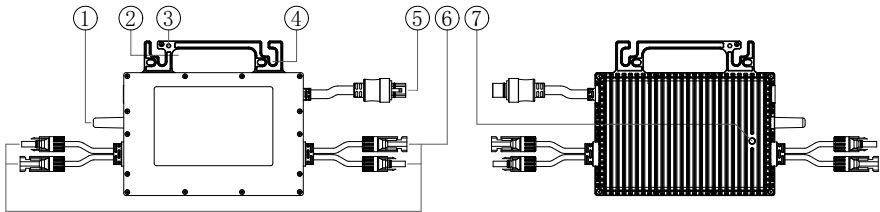

item (of program)	clarification
1	connection with high-ranking officials
2	grips
3	grounding hole
4	mounting hole
5	AC Output Connector
6	DC Input Connector
7	LED indicator

4.6 System monitoring

The microinverters are connected to the Internet through a broadband router, and after following the operating instructions to connect to the system platform, the platform will display current and historical performance trends and inform the status of the PV system in real time.

5. Mounting

5.1 Installation requirements

The installation must disconnect the equipment from the grid and shade or isolate the PV modules.

Ensure that the environmental conditions meet the requirements of the microinverter (protection class, temperature, humidity, altitude, etc.).

Avoid direct sunlight to prevent the internal temperature of the microinverter from rising and causing power reduction.

Keep the inverter away from gas or flammable materials.

Avoid electromagnetic interference as it can affect the normal operation of electronic equipment.

The stripes on the back of the microinverter are heat sinks, make sure the heat sinks are more than 20cm away from other objects when installing and keep them ventilated.

*If you want to check your solar system and put it into operation immediately, assemble it in clear weather.

* We recommend that at least three people work together during assembly or disassembly.

5.2 Parts and tools required for installation




M8 screws*2




M8 nut*2




Ties*10




Screwdriver*1




Hexagonal Wrench*1




Wrench*1



Junction box*1



Voltmeter*1



Protective Gloves*1

*Tools are to be prepared on your own, except for equipment and accessories included in the delivery list.

5.3 Installation Steps

Installing a microinverter involves several key steps, each of which is described in detail below.

- Step 1 - Planning and Installing the Microinverter
- Step 2 - Layout of AC Cables
- Step 3 - Microinverter Connection
- Step 4 - Connecting the Junction Box
- Step 5 - Create Installation Diagram
- Step 6 - Connecting the PV Module
- Step 7 - Powering Up the System
- Step 8 - Setting up a monitoring system

Step 1 - Planning and Installing the Microinverter

- A) Mark the position of each microinverter on the rails according to the PV module layout.
- B) Secure the screws to the rail.
- C) Hang the microinverter on the screws and tighten the screws.



Figure A




Figure B





Figure C

*The microinverter shall be mounted underneath the PV modules to avoid direct sunlight, rain, snow, UV rays, etc.

The AC cable contains the ground wire and can be grounded directly, for areas with special requirements we provide a grounding bracket. A continuous ground cable is routed through the microinverter grounding bracket and connected to an electrode that meets local regulations to complete the grounding requirements.

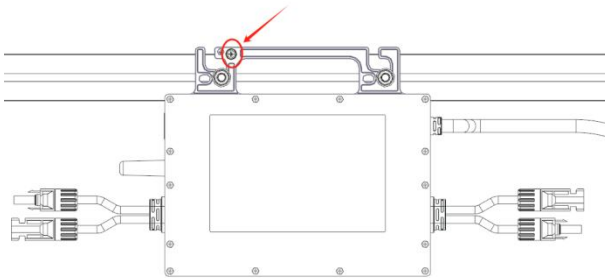

Using a screwdriver, install the grounding bracket wire to the grounding hole on the top of the microinverter and tighten the screw to 2 N.m.


Step 2 - Layout of AC Cables

- A) Determine the number of microinverters to be installed on each AC branch and prepare the appropriate number of AC cables.
- B) Select the appropriate length of AC cable for the distance between the microinverters. Reserve extra length in advance for connecting, trapping and bending the cables.
- C) Lay the trunk AC cables on the rails and secure them briefly so that the microinverters can be connected to the trunk.



Step 3 – Parallel Microinverters


- A) Align the connector of the trunk AC cable with the AC output port on the right side of the microinverter until you hear a “click”.
- B) Repeat the above to connect the microinverter to the same branch line.
- C) Use rolled tape to secure AC cables.

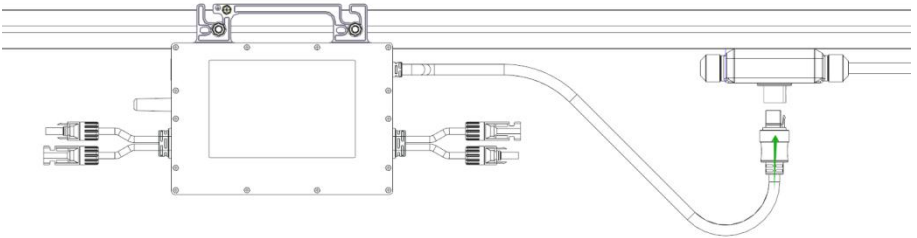

* The number of microinverters on the same branch line must not exceed the maximum number of connections specified.



Step 4 – Connecting the Junction Box

- A) The AC cable is connected to the microinverter AC output port.
- B) Connect the AC cable to an outlet or junction box.
 - a) Connect to the socket.
 - b) Connect to the junction box.

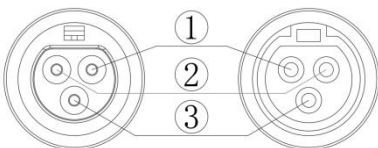


- ① ---L (Line of Fire) Pink
- ② --- N (zero line) Blue
- ③ ---PE (ground) Green and Yellow

*Interfaces and wires used for microinverters.

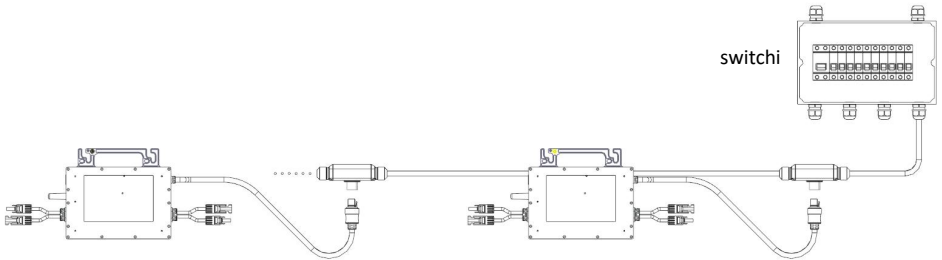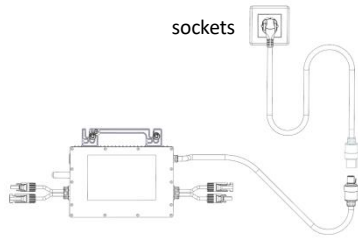

Step 5 - Create Installation Diagram


- A) Peel off the removable label and attach the label to the corresponding position of the microinverter.
- B) Depending on the location of the microinverter in the overall system, attach the appropriate label to the installation diagram.

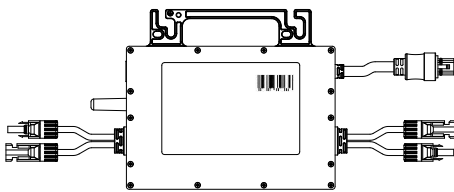

		17 12 0000						
		Phase	Group	Location	Serial			
		1	2	3	4	5	6	7
17 12 0000	1							
	2							
	3							
	4							
	5							
	6							
	7							

Step 6 - Connecting the PV Module

- A) Installation of photovoltaic modules.
- B) Connect the DC cable from the PV module to the DC input port of the microinverter.

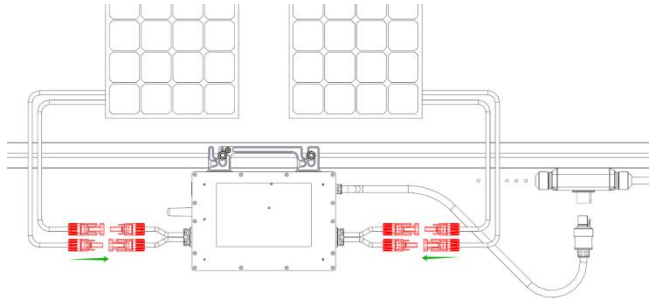

* The DC cable of one PV module must be connected to the DC input port on the same side of the microinverter.

* The power of the PV module should meet the input requirements of the microinverter, please refer to the data sheet.

Step 7 – Powering Up the System

- A) Turn on the AC circuit breaker for the branch circuit.
- B) Turn on the house’s main AC circuit breaker and the system will begin generating power in approximately two minutes.

6. APP

6.1 Download APP

The app allows you to remotely monitor and adjust the microinverter.

Search for "Smart Life" in the Apple App Store and other major app stores, or scan the QR code below to download the "Smart Life" APP.





6.2 Register for an account

1. Click Sign Up to read and agree to the User Agreement and Privacy Policy, and go to the Register page.

2. register an account with an e-mail address or cell phone number. the State/Region is specified automatically and can be changed manually. However, the value of this field cannot be changed after registering an account. click Get **Verification Code**.

3, enter the verification code received, enter to the password setting page, set the password

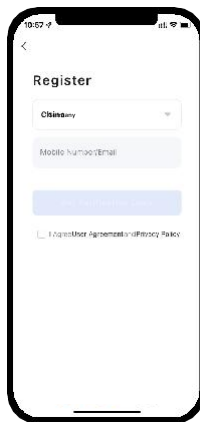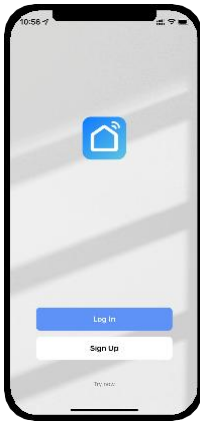

as required and click Done.



6.3 Connecting the microinverter

1. Allowed to go into distribution mode within 3 minutes of power up, AC plugged and unplugged three times within 20s to start the distribution.

2. Open the Smart Life APP, the Microinverter Add button will pop up automatically, click Add to start connecting the microinverter. If the Microinverter Add button does not pop up automatically, you need to manually click the Add Device button to search for nearby devices and enter into the distribution mode.

3. Follow the prompts to enter the Wi-Fi account and password, click the Next button when finished,

and wait a few minutes for the microinverter to complete the distribution.

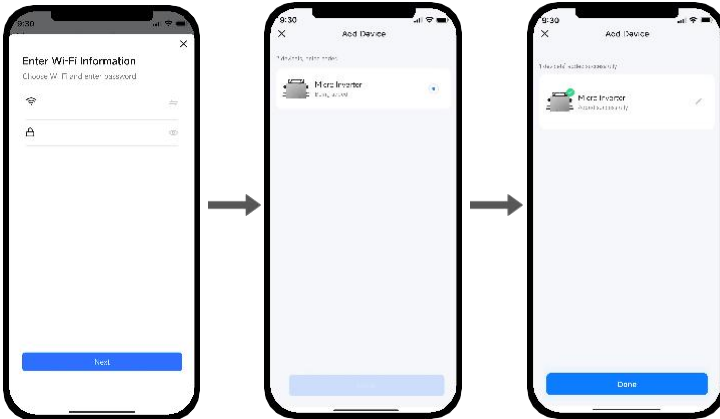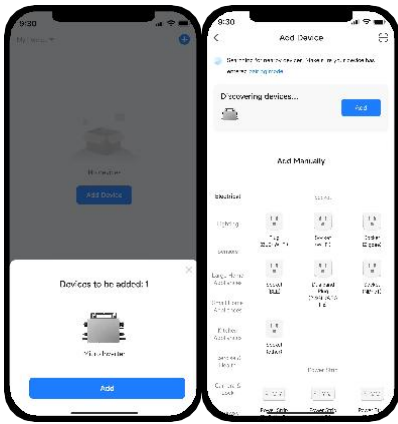


6.4 APP Interface




- Generated and historical data
- Cumulative power generation and savings
- Abnormal Alarms
- Solar Panel Operating Data
- Microinverter Operating Data
- Grid data

1. Click Details to view generated and historical generated data.

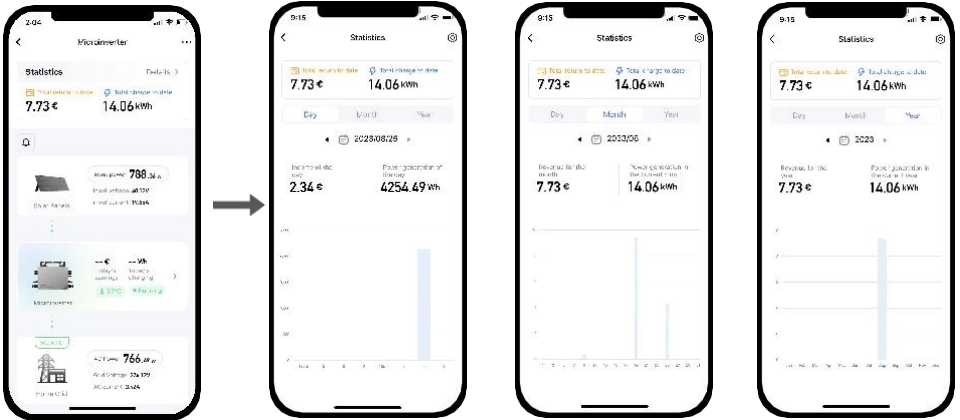


2. Click the Setup button in the upper right corner to access the Rate Setup screen to set the currency and unit price of electricity.

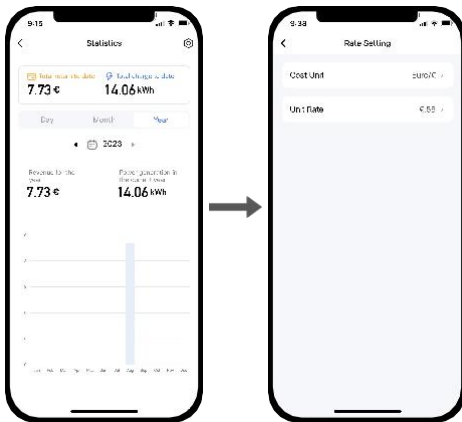

7. Fault resolution

7.1 LED status indication

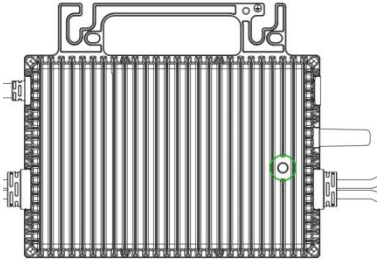

Red light always on	PV input voltage not within specified range
	Grid voltage not within specified limits
	overtemperature protection
	internal failure
green light flashing	MPPT Maximum Power Tracking
Green light always on	Maximum power tracked
the light does not come on	No input voltage
Yellow light on for 5S	WiFi rewiring

7.2 Replacement of microinverters

Follow these steps to replace the microinverter

- a) Turn off the branch circuit breaker and disconnect AC power.
- b) Disconnect the AC connector from the microinverter.
- c) Cover the PV module with an opaque cover to ensure that there is no current in the wires between the PV module and the microinverter.
- d) Disconnect the PV module connector from the microinverter.
- e) Remove the microinverter from the PV mount.
- f) The microinverter to be replaced is mounted to the PV mount.
- g) Remove the shade cover from the PV module.
- h) Connect the PV module connector on the microinverter.
- i) Connect the AC cable on the microinverter to verify that the microinverter is working properly.

*The inverter must be replaced by a trained professional.

* :: The DC operating voltage range of the photovoltaic module must match the allowable input voltage range of the microinverter.

8. Data sheet

Model	NBQ800-EU	NBQ1000-EU	NBQ1200-EU
Input Data (DC)			
Recommended solar panel input power	275-530W×2	275-530W×2	275-530W×2
Number of DC input connections	MC4 ×2		
Max. input voltage	60V		
PV Operating voltage	16-60V		
Start-up voltage	22V		
MPPT tracking range	22-55V		
MPPT tracking accuracy	>99.5%		
Max. continuous input current	14A*2	16A*2	18A*2
Output Data (AC)			
Max. continuous output power	800W	1000W	1200W
Nominal output voltage	230V		
Operating voltage range	190-270V		
Max. continuous output current	3.47A	4.34A	5.21A
Nominal output frequency	50Hz/60Hz		
Output frequency range	47.5-50.5 Hz/58.9-61.9 Hz		
THD	<5%		
Power factor	>0.99		
Peak efficiency	96%		
Protective class	Class I		
Protection Function			
Over/under voltage protection	Yes		
Over/under frequency protection	Yes		
Anti-islanding protection	Yes		
Over current protection	Yes		
Over load protection	Yes		
Over temperature protection	Yes		
Type of enclosure	IP67		
Operating ambient temp.	-40° C to +65° C		
Indication light quantity	Working status: Led light + Wi-Fi Signal Led light		
Communication connection mode	Wi-Fi / 2.4G		

Cooling method	Natural cooling(no fan)
Working environment	Indoor and Outdoor
Weight	2.52 kg
Size (L*W*H) mm	227mm*195.5mm*42mm
Standards	VDE: VDE-AR-N 4105 CE-LVD: EN62109-1, EN62109-2 Rohs: IEC62321

9. Annex 1

Installation of maps

Please make N for north	Panel Group. Azimuth. Sheet ___ of ___		Customer:		Installer.		
	1	2	3	4	5	6	7
a							
b							
c							
d							
e							
f							
g							
h							
i							

10. Annex 2

Wiring Diagram

